



Rehabilitation of Creekbed Sewers Update ANC 3C Environmental Justice Committee

June 9, 2026

Agenda

Project Purpose and Background

Completed Field Activities

Upcoming Field Activities

Closing and Questions

Project Purpose and Background

- Rehabilitate sewer and storm pipes that have outlived their design life
- Rehabilitate defective manholes
- Protect and eliminate exposed sewer assets to the extent practicable – stream restoration
- Repair or rehabilitate stormwater outfalls






Project Locations

3 Project Areas located within National Park Service (NPS) property:

- Normanstone Park
- Glover Archbold Park
- Dumbarton Oaks Park

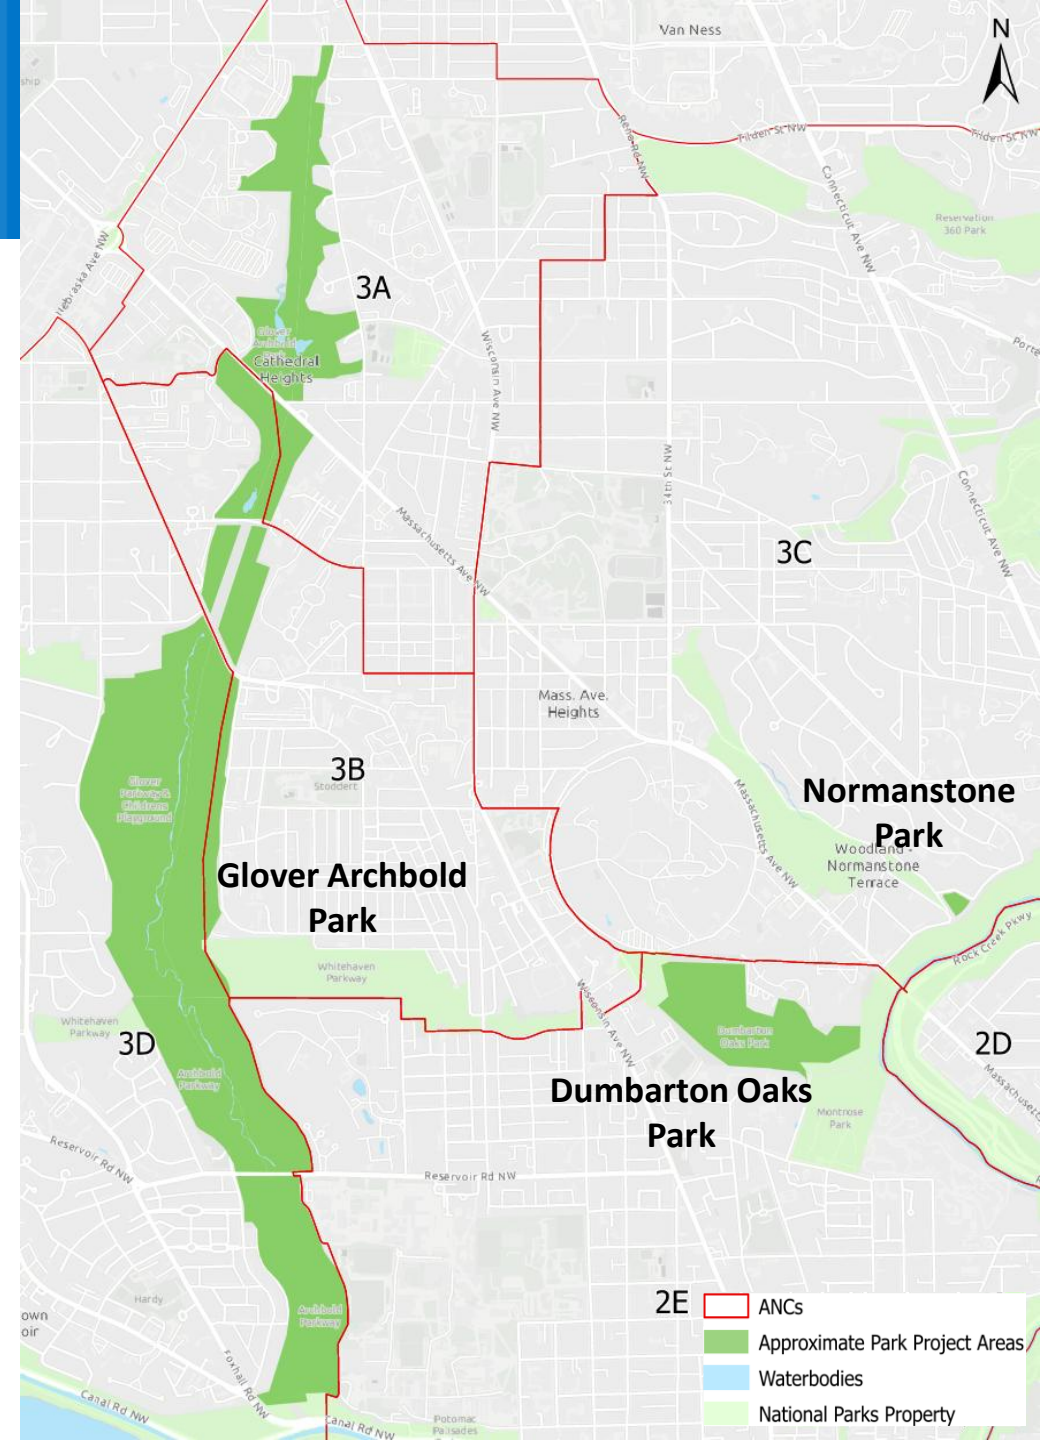

Approximately 4 acres:

- 2 stream restoration sites to protect the 21-inch diameter combined sewer pipes and associated manholes
- Slope stabilization
- Pipes and manholes have already been rehabilitated under another contract.



Approximately 229 acres:

- Approximately 200 manholes and 44,000 feet of DC Water storm and sewer pipes are inside the project area.
- 19 stream restoration sites
- 7 outfall restoration sites



Approximately 29 acres:

- Approximately 21 manholes and 3,120 feet of DC water sewer pipes inside of the project area
- 2 stream restoration sites



Field Activities




Completed Field Activities

Activities have been completed to inform preliminary design concept:

- Initial Manhole and Pipe Inspections
- Tree Surveys along a 200-ft wide path along the pipe alignment
- Stream Assessments
- Wetland and Stream Mapping

*Map showing surveys in a portion of
Glover Archbold Park*

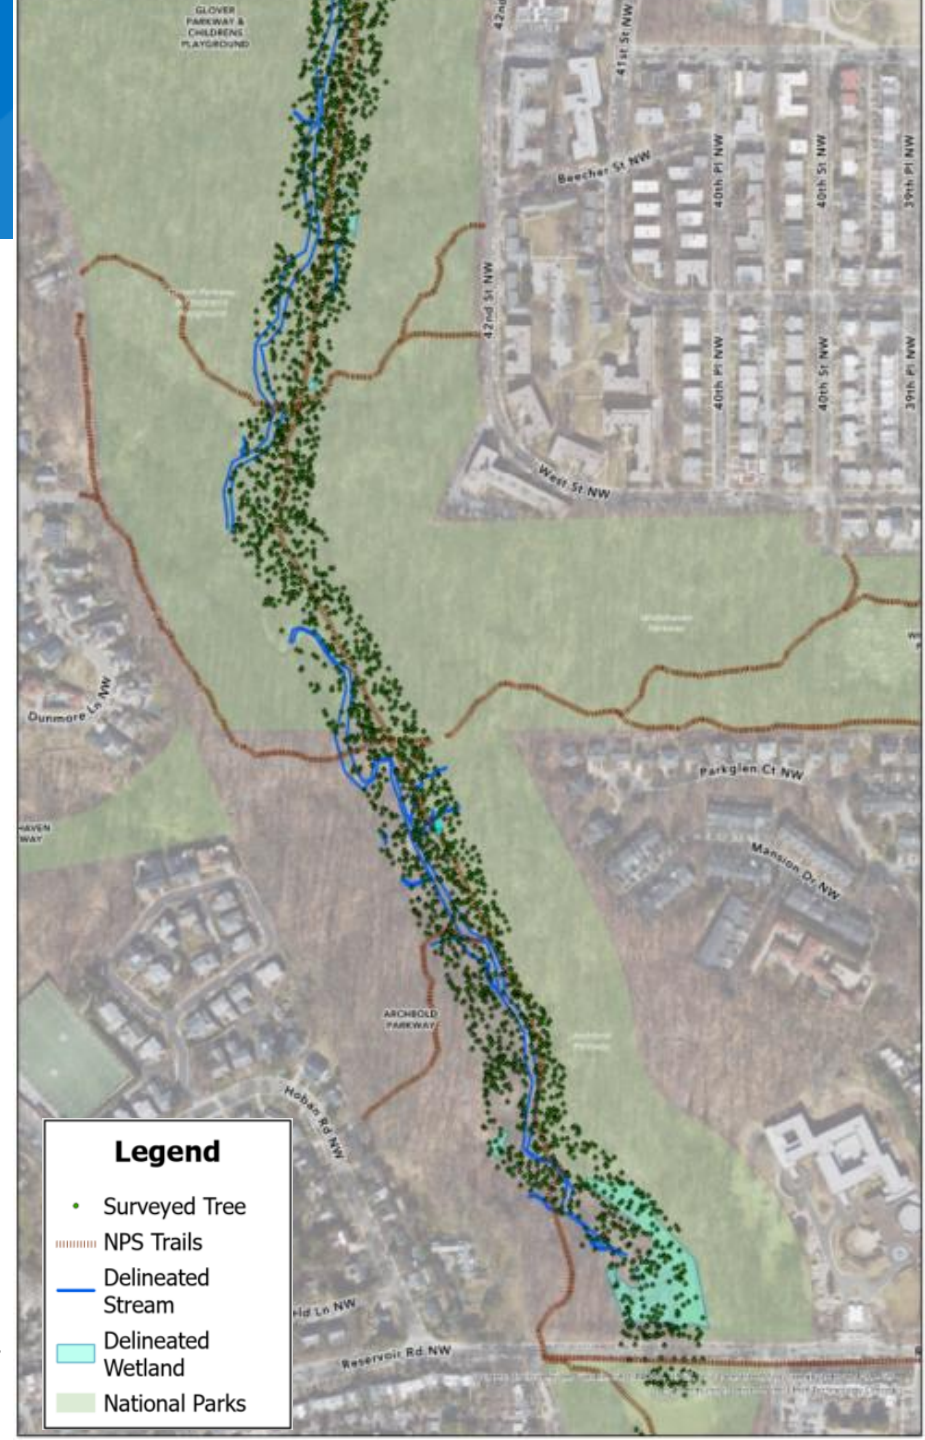




Ongoing and Future Field Activities

Ongoing and future field activities include:

- Soil Testing/Sampling (Normanstone)
 - Drill small diameter holes to investigate subsurface conditions
- Utility Locating (Normanstone)
- Land Surveys
 - Non-intrusive field survey of land shape and elevation to support design
- Additional tree surveys, wetland mapping, pipe and manhole inspections, and site visits/walks are expected as the project concepts are developed

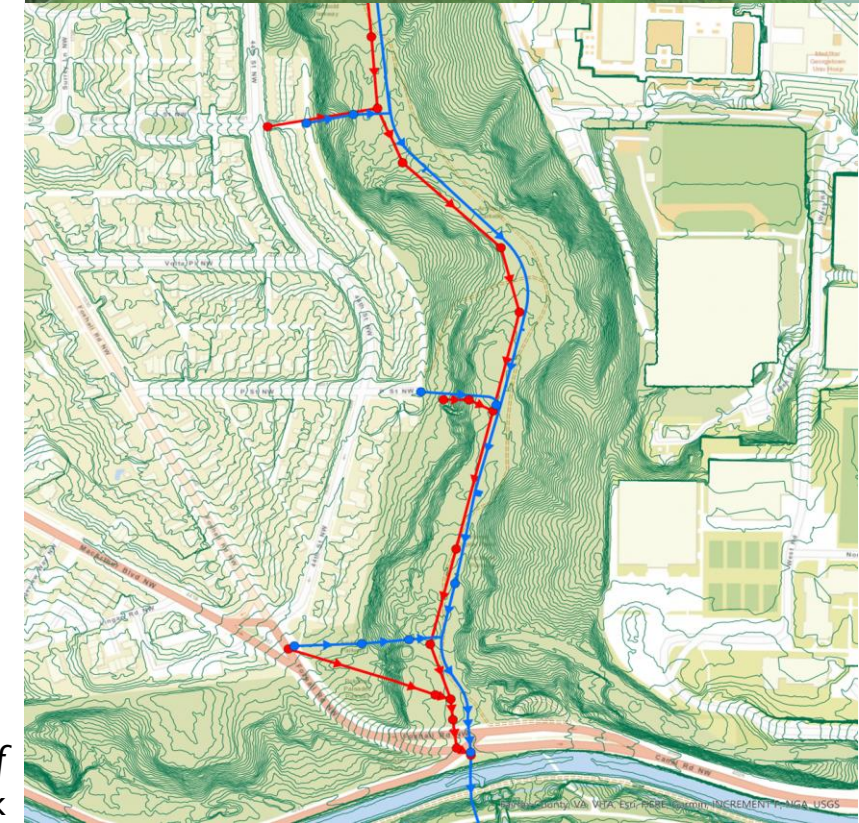

Topography map of a section of
Glover Archbold Park



Approximate Schedule of Field Activities

Upcoming Project Schedule	
Activity	Anticipated Schedule*
Land Survey	Spring 2026 to Fall/Winter 2026
Soil Testing/Sampling and Utility Locating (Normanstone)	Summer 2026
Additional Tree Surveys and Wetland Mapping	Summer 2026 to Spring 2027
Additional Pipe and Manhole Inspections	Fall 2026 to Spring 2027

**Field work is dependent on weather*

↑
Site Walks
and Community
Outreach
↓



Safety and Awareness

During field activities:

- Crews will be working in close proximity to trail users (walkers, runners, explorers and pets)
- Park users should not enter the work zone
- QR coded signage will be posted at the perimeter of the park at various trailheads
- Crews will be sensitive of natural vegetation and wildlife

**Remember crews and equipment will be present. Residents should always keep pets on leash per NPS requirements, in addition to the safety of workers and pets.*



**Rehabilitation of Creekbed Sewers
Project Team Email:**

crsb@dcwater.com

DC Water Community Affairs:

Joyous Willis

202-787-4065

*Scan to visit the
project website*

